

## PORTABLE WATER PRESSURE BOOSTER PUMP PACKAGE

NECO's portable Water Pressure Booster Package was initially designed and used to provide water for military field showers; although it is ideally used anywhere additional water pressure is required on a temporary basis.

The Basic package is capable of providing constant pressure of 40psi with a flow of 100 gpm using a single pump controlled by a variable frequency drive controller. A standard Hubble connector with a 20 foot power cable for 208 Volt 3 phase power is provided.

Should only single phase power be available the Variable Frequency Controller will automatically convert the single phase power source to 3 phase for the motor.

Weighing less than 150lbs., the package is lightweight compared to fix location packages and can be moved by two people. A drawing of the package is on the reverse side of this datasheet.

The package is ready to use and requires a single power connection along with suction and discharge connections. The package is designed to withstand outdoor environments

## STANDARD FEATURES

- Closed coupled bronze fitted end suction pump for 110gpm @ 40psi
- 1-2" Check Valve

• 5HP 208V/60/3 TFEC motor


- 2- 2" ball valve
- Suction & discharge connections are 1-1/2" CAMLOK connections
- 1- hose bib
- Yaskawa IQPump Variable frequency pump controller 208V 3 phase or 230V 1 phase
- 1- Steel Frame for mounting and protection of the pumping components
- 10 Gallon Hydro-pneumatic expansion tank
- Operation with single or three phase power

## Neco's other packaged & customized systems include:

- Water Pressure Booster
- Sewage Lift Stations
- Boiler Feed Systems
- Elevator Sump Pumps with oil sensors
- Packaged Chilled Water and Hot Water Circulating Systems

- Condensate Return Units
- Geothermal Circulating Systems
- Rain Water Harvesting Systems
  - Heat Transfer Systems
  - Fuel Oil Pump Sets



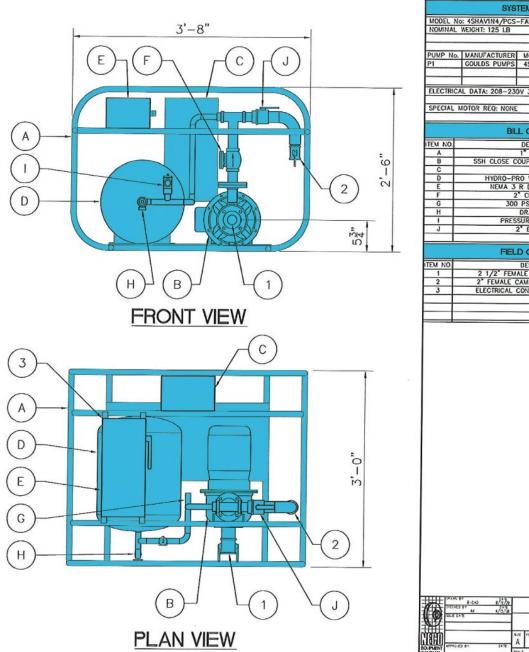

S16				(1)							T	_	
				SY	STE	EM DE	SCRI	MOTO	٧				
MODEL						AB				_	=	_	_
NOMINA	LW	EIGHT:	: 12	5 LB									
	_		_		_		_				_		
PUMP N	o.	MANUE	FAC	TURE	R	MODEL	NUMB	ER	GPM	TDI	1	HP	RPI
P1	$\Box$	GOULD	S F	PUMP	S	4SH2J	5200(5	.5)	145	81	1	-	-
	4			_	+						1		
CLECTR		DATA		00 0	170	7511	7550			_	1		
ELECTRI	CAL	DATA	: 2	08-2	230V	3PH	TEFC		_		_	_	
SPECIAL	. M	OTOR I	REQ	: NO	NE					_	_		
				Ε	BILL	OF	MATER	IAL					
TEM NO.			_	_	_	DESCR			_	_	_	but	NTIT
A	Н		_			* DIA					-	1207	1
В	SSH CLOSE COUPLED END SUCTION PUMP										83		1
С	V.F.D.												1
D E	HYDRO-PRO WATER SYSTEM TANK NEMA 3 R DISCONNECT SWITCH 2° CHECK VALVE											-	1
F	NEMA 3 K DISCONNECT SWITCH 2" CHECK VALVE											$\vdash$	1
G	300 PSI TRANSDUCER											$\vdash$	1
Н	DRAIN VALVE PRESSURE RELIEF VALVE												1
J	$\vdash$			PR	ESSU	JRE RE	UEF V	ALVE					1
	-					DALL	VALVE				-	1	1
				FRE	1 D	COM	NECT	MA					
TEM NO.				_	-	FECDI	DTICAL						LI POR
1		2	1/3	2° FF	MAL	E CAL	TOK W	ATER	INIF	ī	_	NOV	חחר 1
2	2" FEMALE CAMLOK WATER DISCHARGE											1	
3	2 1/2" FEMALE CAVLOK WATER INLET 2" FEMALE CAVLOK WATER DISCHARGE ELECTRICAL CONNECTION 208-230 3PH											1	
			_	_							_		
			_						_		-	-	_
	N 87	2-C×3 M		1/4/2	+				_				
ш				4/5/2		more	MOE		B009	STER	1		
IIIHRI	0.63			9/3/3	sire A	rsov va	MOE	BLE I	_	STER		7	7Ex. 0

## Neco's other packaged & customized systems include:

- Water Pressure Booster
- Sewage Lift Stations
- Boiler Feed Systems
- Elevator Sump Pumps with oil sensors
- Packaged Chilled Water and Hot Water Circulating Systems

- Condensate Return Units
- Geothermal Circulating Systems
- Rain Water Harvesting Systems
  - Heat Transfer Systems
  - Fuel Oil Pump Sets

Visit us on the web  $\sim$  <u>www.necosystemsinc.com</u>